

Game on!

Plug and play with PryTerms[™] – our pre-terminated fibre optic cables.







A brand of the

Plug and play with PryTerms™

Have you ever been in a potentially dangerous or really cramped place trying to splice multiple fibres? Then you'll understand exactly how much you'll save on stress and deployment time using pre-made terminations including ready-to-use connectors. Our PryTerms™ solutions are available with up to 144 fibres and for a range of cable construction such as loose-tube, ribbon and riser. Relax and join a completely new kind of ball game.

PryTerms™

Overview of product range

- Ideal where field termination is impractical and for time critical situations
- An effective and efficient cable deployment option for any size of fibre optic network
- High precision factory termination, together with exceptional quality cable in a range of construction and styles
- Full factory tested terminations
- Both cable ends are terminated with loose-tube fan out kits ensuring ease of installation
- The cables can be manufactured to any size with a range of fibre core counts, connector types
- Indoor & outdoor cable.

Applications

- Installations requiring a quick turn around
- Data Centre, SAN, MAN & Enterprise Space
- Dangerous Environments
- Plug and play networks
- Site and campus networks
- Tunnels, Railways & Mining Sites.

Features and benefits

- Compact multifibre terminations available up to 144 fibres
- No need for splicing equipment, which decreases deployment time
- The factory made and tested terminations and quality connectors decrease losses
- As these are pre-connected assemblies, deployment time is decreased – it's as simple as plug and play
- Improved space management in high density applications as the break out units are compact in size
- There are a range of cable constructions available (loose-tube, ribbon, riser etc)
- Potential damage during hauling and installation is limited due to the optional integrated connector sheath.







♦ PRYSMIAN
♦ Draka
♥ General Cable

Prysmian Group is world leader in the energy and telecom cable systems industry. With almost 140 years of experience, sales exceeding €11 billion (pro-forma as of 31.12.2017), about 30,000 employees in over 50 countries and 112 plants, the Group is strongly positioned in high-tech markets and offers the widest possible range of products, services, technologies and know-how.

The Prysmian Group corporate brand, operates in the market through three distinct commercial brands – Prysmian, Draka and General Cable. These are three of the global cable industry's strongest brands, characterised by highly complementary products and services. We use our three commercial brands when talking about products and solutions, and each represents a specific part of the overall offering that Prysmian Group presents to its customers.

Manufacturing options:


| Cable type | Cable name | Description | Fibre counts | Oversleeving sizes (mm) | Jacket options | | |
|---------------------------------|------------------------------------|--|-----------------|----------------------------|-------------------------|---|--|
| Application – Internal | | | | | | | |
| Distribution | Riser | 900 um tight-buffered distribution cable | 2-24 | 2.0 | LSOH | | |
| | M15 | 250 um, Plco Style, reduced diameter | 12 | - | LSOH | | |
| | M07 | 250 um, double sheath, robust cable, DC cable for raceways | 12 | - | LSOH | | |
| | M05 | 250 um, FlexTube design, Drytube DC cable | 12-144 | 2.0 | LSOH | | |
| Breakout | M06 (Trunk cable) | 2.0/3.0 mm tight-buffered break out cable, DC cable | 12-144 | - | LSOH | | |
| Application - Internal/External | | | | | | | |
| Multi Loose Tube | SM@RTCORE® MINISM@RT™ | 250 um loose tube fibre cable | 6-144 | 0.9,2.0 | HDPE/NYLON, LSOH, PE | | |
| Central Tube | Central Tube Central Tube Light | 250 um loose tube fibre cable | 6-144 | 0.9,2.0 | HDPE/NYLON, LSOH, PE | - | |
| Micro Modules | FLEXTUBE [®] | 250 um fibre | 6-144 | 0.9,2.0 | HDPE/NYLON, LSOH, PE | | |
| Ribbon | Ribbon Cables | 250 um Ribbon module | 12-144 | 0.9,2.0 | HDPE/NYLON, LSOH, PE | | |

Technical data

| Mode | Single mode (1310/1550 nm) | Multimode (850 nm) | |
|-----------------------------|--------------------------------------|--------------------|--|
| Maximum insertion loss (dB) | \leq 0.3 Typical 0.2 (UPC and APC) | ≤ 0.4 (PC) | |
| Return loss (dB) | ≥ 55 (UPC), ≥ 65 (APC) | Not measured | |
| Intermate ability | IEC 874-14 | IEC 874-14 | |
| Operating temperature | -40°C to +85°C | -40°C to +85°C | |





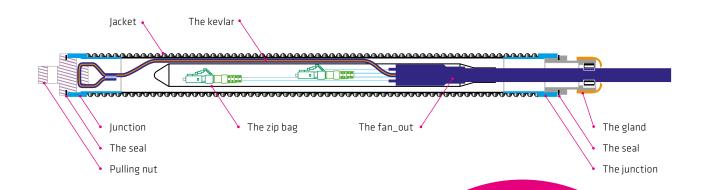

Cable hauling accessories

Prysmian offer three different pulling solutions that give a variety of protection:

- Light duty can be a light weight conduit or pulling sock. Capable of pulling low force items through uncongested large diameter circuits.
- Medium duty offering more robust protection, and a pulling force of up to 250 N.
- Heavy duty has a high impact conduit, with a pulling force of 1 kN. As well as this, it provides protection cover for the fibres, that is easy to remove/replace when not in use.

All of the pulling systems are designed for total protection with full flexibility, aiding the installation process whilst not impacting the performance of the cable.

We can tailor make options for other solutions if required.






Light duty connector protection





Medium duty connector protection & pulling sock



Heavy duty connector protection & pulling sock

How to create a Part Number

The part number for PryTerms[™] begins with a 2 or 3-digit code for fibre count. This is followed by a dash and then a two-digit code for the length of the pre-terminated cord.

Another dash is followed by a two-letter code, the first letter represents the connector on one end, and the second letter represents the connector at the other end of the preterminated cord. Another dash is next, followed by a two-digit code which denotes the oversleeving diameter.

Another dash is then followed by a two-letter code, the first digit representing the Pulling sock and the second letter represents the necessity of a Drum.

A final dash is followed by a two-letter code, the first letter denoting the fibre type, and the second to indicate the sheath colour of the pre-terminated cord.

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group: any modification or alteration afterwards of product may give different result. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.

Pulling Sock and does not need to be wound onto a drum. The fibre type is G657A1 and the cable will have a yellow sheath.

Linking the future

Prysmian Australia Pty Ltd

1 Heathcote Road, Liverpool 2170 NSW, Australia Ph: 1300 300 304 Fx: 1300 300 307 E-mail: sales.au@prysmiangroup.com www.prysmiancable.com.au

Prysmian New Zealand Ltd

30 Binsted Road, New Lynn 0600 Auckland, New Zealand Ph: (09) 827 3109 Toll Free: 0800 492 225 E-mail: sales.nz@prysmiangroup.com www.prysmiancable.co.nz

Connect with us

F Prysmian Australia & New Zealand

in Prysmian Group





