

Fill up!

MINISM@RT - more fibres than ever in every duct.



A brand of the

Prysmian
Group

More fibres than ever in every duct.

Our new easy to install MINISM@RT loose tube cables add a completely new dimension to optical fibre deployment. The compact, lightweight design allows for you to increase the number of fibres in a duct, lower the number of ducts needed or extend the life of existing ducts – all of which offer significant cost savings. Plus, the strong, still smooth nylon sheath reduces friction and protects against termites. Bank up!

MINISM@RT

Minism@rt cables present the next stage in fibre optic cable deployment. Using state of the art manufacturing technology and process control, Prysmian has drastically miniaturised loose tube cables, offering benefits to both installers and network owners.

This radical reduction in cable cross-section leads to high fibre-density cables, significantly increasing duct utilisation. This offers the potential to increase the number of fibres in a duct, lower the number of ducts needed or extend the life of the existing infrastructure, all of which offer significant savings to network owners.

The compact, light-weight design leads to ease of installation and cable handling. The nylon outer jacket reduces friction through tight bends, increasing the lengths of cable that can be installed. It also provides an effective barrier against attack from termites.


MINISM@RT cables can be blown through mini sub-duct as small as 10 mm in diameter. Blowing the MINISM@RT cable can offer significant cost savings compared with hauling the corresponding SM@RTCORE® cable.

Features and Benefits

- Stranded tube design
 - conventional construction enabling mid-span entry.
 - 12 fibres and 24 fibres per tube available.
- Compact design
 - high fibre-density enables more fibre per duct.
- Precision engineered
 - high strength materials ensure mechanical performance.
- Flexible and light-weight
 - easier and quicker to install.
- More cable per drum
 - longer lengths on a given drum size can lower installation costs.
- Versatile installation
 - cables can be hauled into ducts or installed into sub-ducts using light-weight cable jetting equipment.
- Two options of sheath available: PE sheath only (for New Zealand applications) or bonded nylon sheath (for applications in Australia).

Fibre count	SM@RTCORE® O.D (mm)	MINISM@RT O.D (mm)	Cross section reduction (%)
2-72	10.0	6.6	57 %
96	10.7	7.5	51 %
144	13.6	8.6	60 %
288	15.6	10.2*	57 %

*24 fibres per tube construction

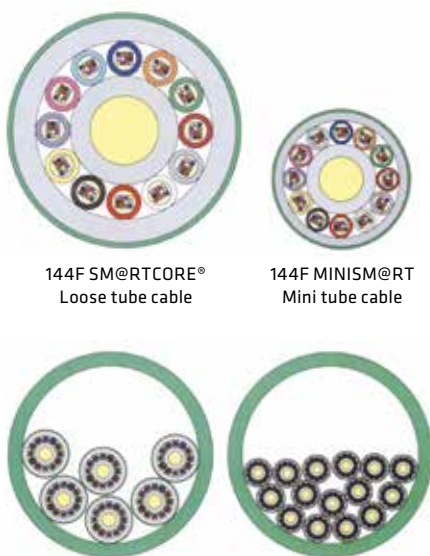

All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian Group; any modification or alteration afterwards of product may give different result. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian Group. The information is believed to be correct at the time of issue. Prysmian Group reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian Group.

